

**Miyano**

# BND51

Fixed Headstock Type CNC Automatic Lathe




# SY

We introduce a new bar machine equipped with a subspindle and a Y axis that can machine bar material up to  $\phi 51$  mm.

The structure of the machine, consisting of precision scraped square guideways that provide high rigidity and excellent vibration damping characteristics and a heavy 30° slanted bed of a platform construction with appropriately arranged ribs ensuring good thermal stability and minimum dimensional changes over time, realizes consistent high machining accuracy.






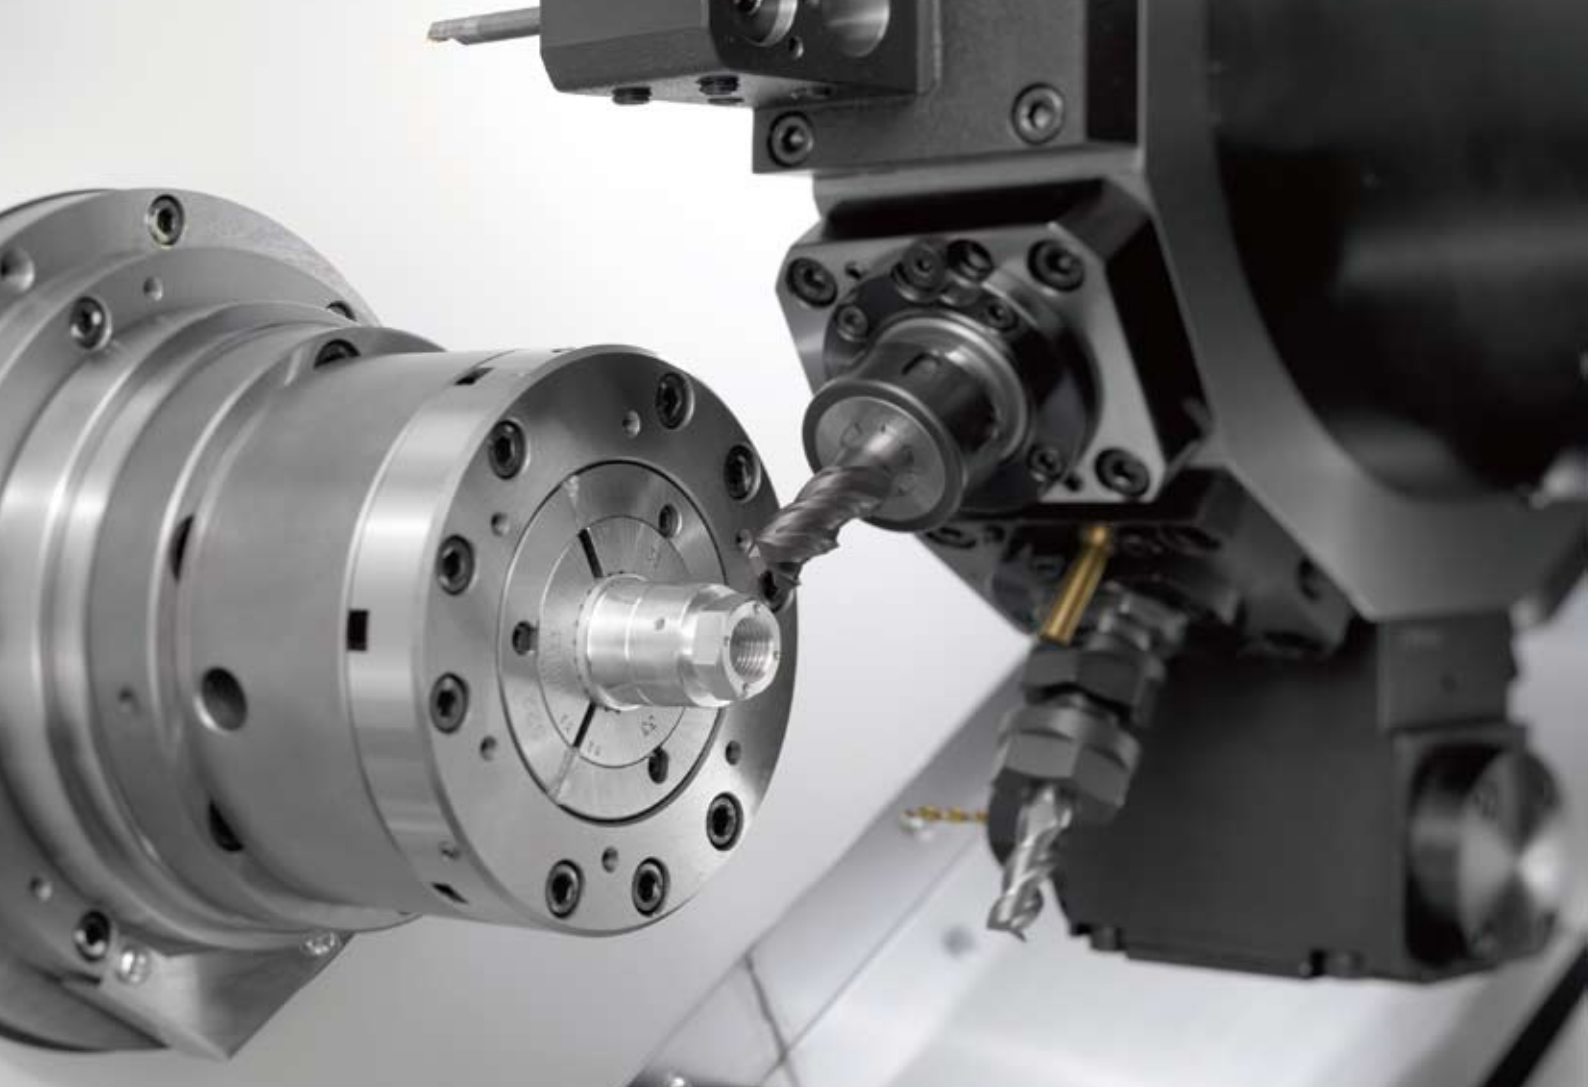

### Strong, Highly Rigid Construction

Rigid square guideways are used for all axes. The 30° slanted bed where major machine units such as spindles and tool slides are mounted has been given a platform-like ribbed structure to provide rigidity and stability. This structure combined with exceptional rigidity ensures the Miyano characteristics of high precision, consistent production and extended tool life.

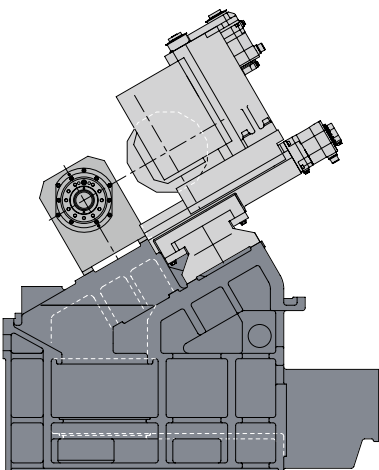

### Complex Machining with Y Axis Control

The combination of independently driven revolving tools that can be mounted at all positions on the turret with the Y axis and the subspindle realizes a high level of process integration in complex machining.

### Easy to Use Tooling System

Double sleeve holders and double turning holders allow multiple tools to be mounted at a single position on the turret to maximize tooling flexibility.

## Standard Equipment and Options



Part catcher (standard)



Part conveyor (standard)




Chip conveyor (optional)






# Tooling system

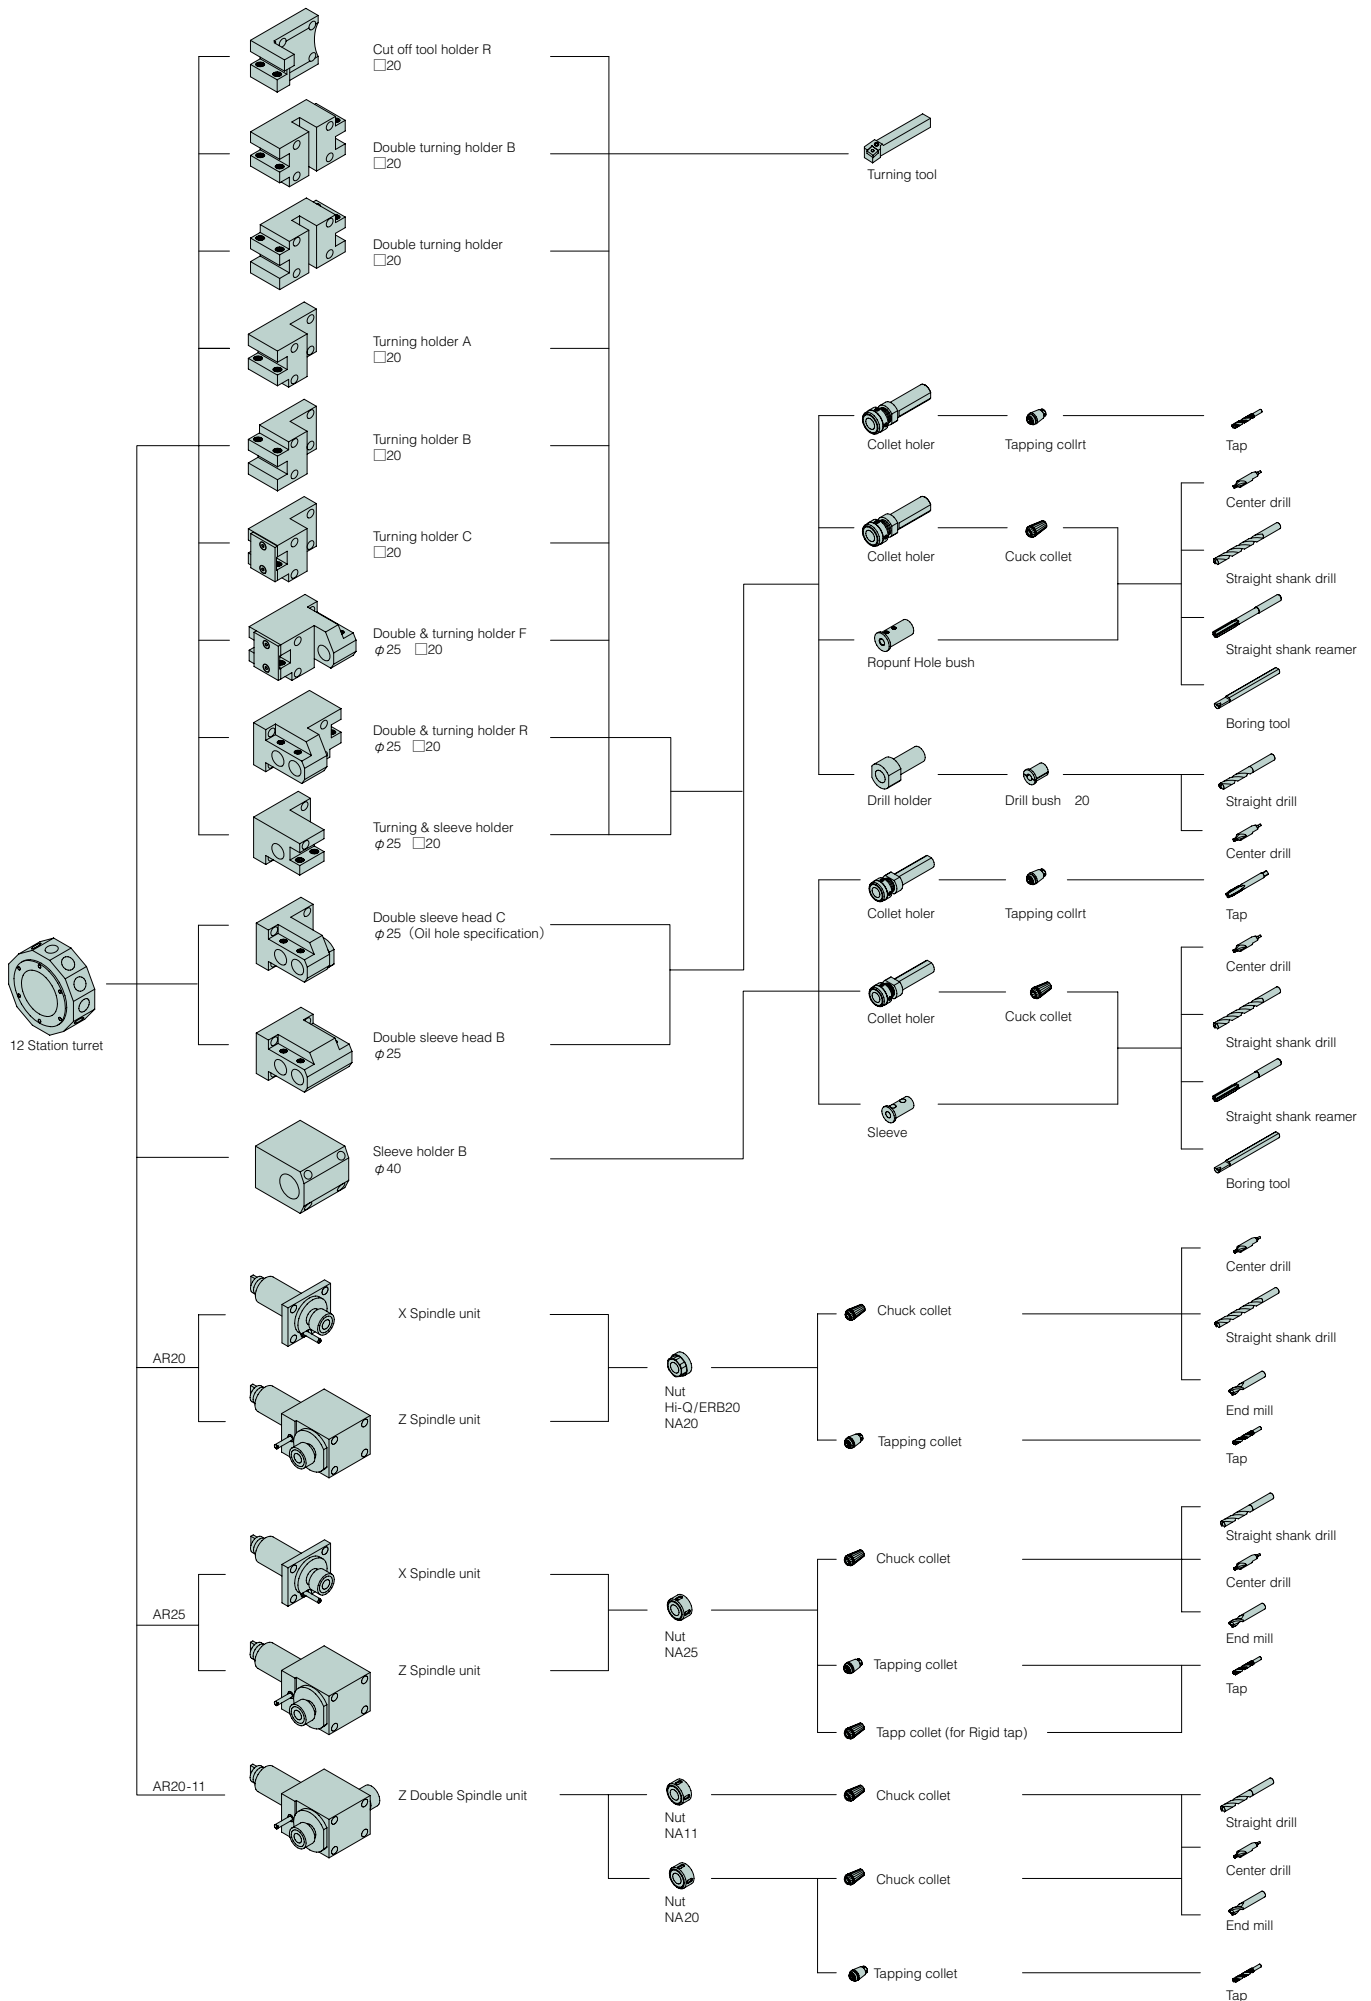

## External view

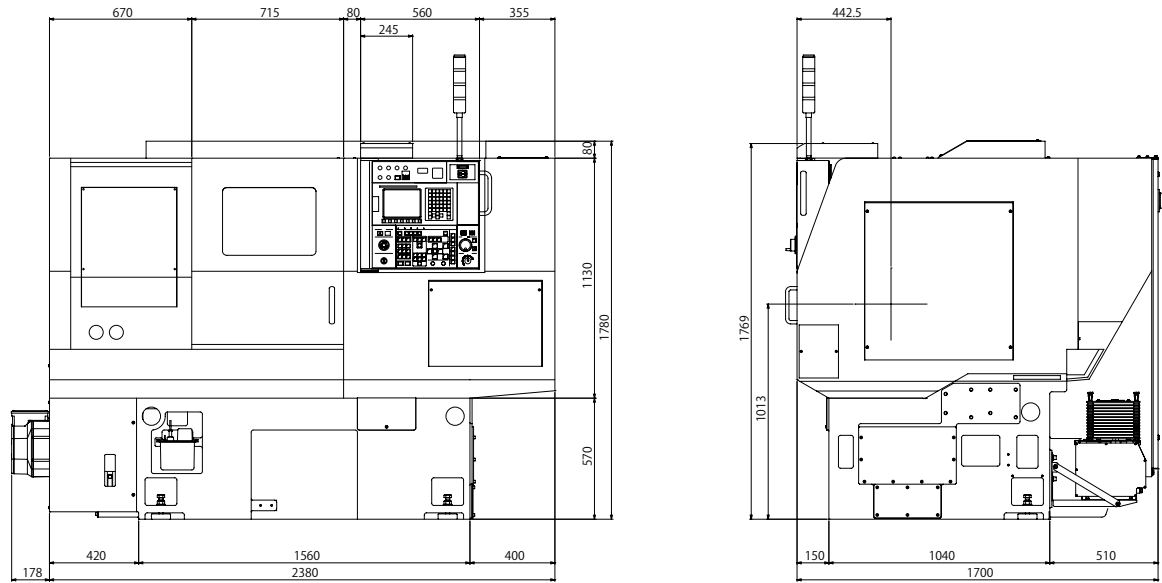

## NC Custom Menu

'One-touch' functions for faster set-ups.



**Custom menu**  
Displays the list of custom screens.




**Block skip**  
Used to set block skip 1 to block skip 9.



**Tool counter**  
Used to set and reset the tool counter stop value and enter the tool wear offsets.



**Cycle time**  
Measures the cutting time, non-cutting time and running time in each cycle.




**Automatic running monitor**  
Displays the control status of each axis. Used to set ON / OFF for the machine lock function.




**Start condition**  
Used to set the start conditions for automatic running.



**Spindle & RVT**  
Used to set the rotational speed of the spindle and revolving tools. Used to set the spindle override.




**Maintenance**  
Used to set ON / OFF for the maintenance items. Used to set ON / OFF for turret zero point adjustment.



**C Zero point adjust mode**  
Easy to adjust the C axis zero point.



**Turret Maintenance**  
Used to adjust the turret zero point.



**Manual operation**  
Displays the zero point lamp status and the machine coordinate of each axis.



**Option device**  
Used to select an auxiliary device such as a part catcher to be operated manually.

# Machine specifications

Item	<b>BND-51SY2</b>	
<b>Machining capacity</b>		
Maximum work length	320 mm	
Maximum bar Dia.	51 mm Dia.	
Maximum blank diameter	chucker	Max. 210 mm Dia.
<b>Spindle</b>		
Number of spindles	2	
Spindle speed	50 - 5,000min <sup>-1</sup>	
Draw tube Dia.	SP1	52 mm Dia.
	SP2	26 mm Dia.
Power chuck type	Hydraulic	
Type of collet chuck	SP1	H-S22 Pads
	SP2	H-S16, S22 pads
Power chuck size and type	SP1	6" Through hole type
	SP2	5" Through hole type
<b>Turret</b>		
Number of turret	1	
Turret stations	12 ST.	
Shank size of square turning tool	20 mm Sq.	
Diameter of drill shank	25mm Dia.	
Turret index time	0.25 sec./ 1 pos.	
<b>Feed rate</b>		
Slide stroke	Xaxis	175 mm
	Zaxis	435 mm
	Yaxis	75 mm
	Baxis	530 mm
Rapid feed rate	Xaxis	18 m/ min.
	Zaxis	20 m/ min.
	Yaxis	12 m/ min.
	Baxis	18 m/ min.
<b>Revolving tool</b>		
Number of revolving tools	Max12	
Tool spindle speed range	60 - 6,000min <sup>-1</sup>	
Capacity	Drill	Max 13 mm Dia.
	Tap (Steel)	Max M8
	Tap (Al, Brass)	Max M8
<b>Tank capacity</b>		
Hydraulic oil tank capacity	10 L	
Lubricating oil tank capacity	2 L	
Coolant tank capacity	150 L	
<b>Machine dimensions</b>		
Machine height	1,700 mm	
Floor space	2,560 mm × 1,700 mm	
Machine weight	4,750 kg	
<b>Motors</b>		
Spindle motor	SP1	AC 15/ 11 kW
	SP2	AC 5.5/ 3.7 kW
Revolving tool motor	AC 2.2 kW 20 Nm	
<b>Power supply</b>		
Voltage	AC 200/ 220 V ± 10%	
Capacity	37 KVA	
Fuse	125 A	
Air supply	0.5 MPa (5 kgf/ cm <sup>2</sup> )	
<b>Others</b>		
Splash guard interlock, Revolving tool driving unit, Pneumatic, Spindle brake No.1, High pressure coolant, Parts Catcher, Parts conveyor, Work ejector & inner high pressure coolant.		
<b>Optional accessories</b>		
Collet chuck system, Power chuck system, Spindle brake No.2, Chuck air blow, Automatic fire extinguisher, Automatic power shut-off, Coolant level switch, Sub spindle Inner high pressure coolant & air blow, Speed setter, Chip conveyor, Chip box, Foot switch, Total & preset counter, Coolant mist collector, Oil mist damper, Warning light, Cut-off confirmation, Large bore spindle, Bar feeder interface, Filler tube, Spindle inner bushing, RS-232C port, etc.		

## NC specifications

	FANUC 0i-TD
Axial control	X, Z, Y, B, Cs
Simultaneous control axis	4 axis
Minimum setting unit	0.001mm, 0.001deg, Cs axis
Minimum output unit	X: 0.0005mm, Z: 0.001mm Y: 0.001mm, B: 0.001mm, Cs: 0.001deg
Interpolation functions	G00, G01, G02, G03, G04, G32, G33
Program storage capacity	1 Mbyte (2560 m)
Spindle function	S4 digit
Cutting feed rate	F3.4 digits per revolution, F6 digits per minute directly specified
Feed rate override	0 - 150% (10% steps)
Rapid feed override	F0, 25, 50, 100%
Thread cutting	G32, G33, G92
Canned cycle	G90, G92, G94
Tool function	T AABB (AA=Tool number and geometry, BB=Wear offset number)
Tool position direct input function	by measured MDI Data input-and-output Memory card interface, USB memory interface, Auto data backup
Automatic operation	1cycle/ Automatic operation, Single block, Block delete, Machine lock, Optional block skip, Dry run, Feed hold
Others	8.4" color LCD/ MDI, Program storage capacity addition: 800pieces, A decimal point input, Manual pulse generator Memory protect, AC digital servo motor, The circle radius R command, Nose radius compensation, Constant surface speed control (G96), Back ground editing, Programmable date input (G10), Run hour/Parts count display, Multiple repetitive cycles (G70 - G76), Spindle rigid tap, Polar coordinate interpolation, Custom macro B, Canned cycles for drilling, Tool life management. etc.
NC Option	Helical interpolation, Leader puncher interface, etc.

## CITIZEN MACHINERY CO., LTD.

**CITIZEN**  
Micro HumanTech

<b>JAPAN</b>	CITIZEN MACHINERY MIYANO CO.,LTD. 4107-6 Miyota, Miyota-machi, Kitasaku-gun, Nagano-ken, 389-0206, JAPAN	TEL.81-267-32-5901 FAX.81-267-32-5908
<b>SOUTH ASIA</b>	CINCOM MIYANO ASIA SALES CO.,LTD. 1230 Rama 9 Road, Kwang Suanluang, Khet Suanuang, Bangkok 10250 THAILAND	TEL.66-23-745-226 FAX.66-23-745-228
<b>KOREA</b>	CINCOM MIYANO KOREA CO.,LTD. Room No.105 BYUCKSAN DIGITAL VALLEY I 212-16, Guro-3dong, Guro-gu, Seoul, KOREA	TEL.82-70-4337-1325 FAX.82-70-8220-8539
<b>TAIWAN</b>	CINCOM MIYANO TAIWAN CO.,LTD. 10Fl., No.174, Fuh Sing N. Rd., Taipei, TAIWAN	TEL.886-2-2715-0598 FAX.886-2-2718-3133
<b>CHINA</b>	CITIZEN (CHINA) PRECISION MACHINERY CO.,LTD. 10058, XINHUA ROAD OF ZHOUCUN, ZIBO, SHANDONG, P.R. CHINA	TEL.86-533-6150560 FAX.86-533-6161379
<b>EUROPE-Germany</b>	CITIZEN MACHINERY EUROPE GmbH Mettinger Strasse 11, D-73728 Esslingen, GERMANY	TEL.49-711-3906-100 FAX.49-711-3906-106
<b>EUROPE-UK</b>	CITIZEN MACHINERY UK LTD 1 Park Avenue, Bushey, WD23 2DA, UK	TEL.44-1923-691500 FAX.44-1923-691599
<b>AMERICA</b>	MARUBENI CITIZEN-CINCOM INC. 40 Boroline Road Allendale, NJ 07401, U.S.A.	TEL.1-201-818-0100 FAX.1-201-818-1877

URL:<http://cmj.citizen.co.jp/>

All specifications are subject to change without prior notice. This product is an export control item subject to the foreign exchange and foreign trade act. Thus, before exporting this product, or taking it overseas, contact your CITIZEN machine dealer. Please inform your CITIZEN machine dealer in advance of your intention to re-sell, export or relocate this product. For the avoidance of doubt products includes whole or part, replica or copy, technologies and software. In the event of export, proof of approval to export by government or regulatory authority must be evidenced to CITIZEN. You can operate the machines after the confirmation of CITIZEN. CITIZEN is a registered trademark of Citizen Holdings Co., Japan.